Sectt. II-27—45,004—14-11-29.

(19) Department.

SERIES.

G.O. No. 1549

DATED 4-4-1930

[Despatch Abstract.]

Petroleum

Two Form B licenses - dangerous - 5000 gallons each - Mr. Y. Krishtappa Shetti, Baindur, South Kanara District - granted.

C.F. 80.

Law (General) **DEPARTMENT.**

Cl. 2649 C

Received ..... 19 . *Registered* 28/3/30 19 .

Subject.

Petroleum - dangerous - B form licenses - grant to ---
Mr. Y. Krishtappa Shetty - recommended.

ENCLOSURES.
No. .....
.....
Spare copies .....

Ref.C.1No.-468-1930.

Station Mangalore, , *Dated the* 24th March, 1930.

From (Name) G. W. Wells, Esquire, M.A., I.C.S.,
(Designation) Dt. Magistrate of South Kanara.

To The Secretary to the Government of Madras,
Law (General) Department,
Madras.

Sir,

I enclose the applications dated 10-12-29 and 29-1-1930 of Mr. Y. Krishtappa Shetti of Baindur for the grant of two B form licenses for the possession of 5,000 gallons of dangerous petroleum, otherwise than in bulk, at each of his godowns at Coondapoor and Yedthare villages of this District.

2. The Tahsildar Magistrate, Coondapoor has inspected the sheds and found that they comply with all the conditions prescribed. I enclose his reports dated 1-2-30 and 3-3-30.

3. The Treasury Chalan receipts Nos.415/21- 2-1930

and 133/4-3-1930 of the Coondapoor Sub-Treasury enclosed show that Mr. Krishtappa Shetty has paid Rs.20 as fees for each of the two licenses he desires to have. I recommend that he may be granted the licenses as requested by him.

Your obedient servant,

For Dt.Magistrate.

25.3.30

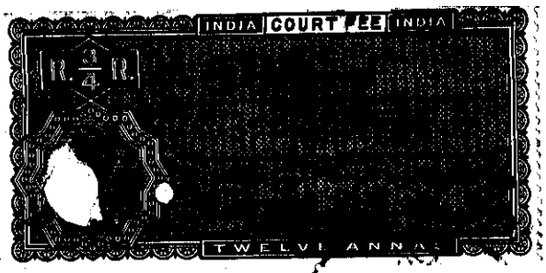

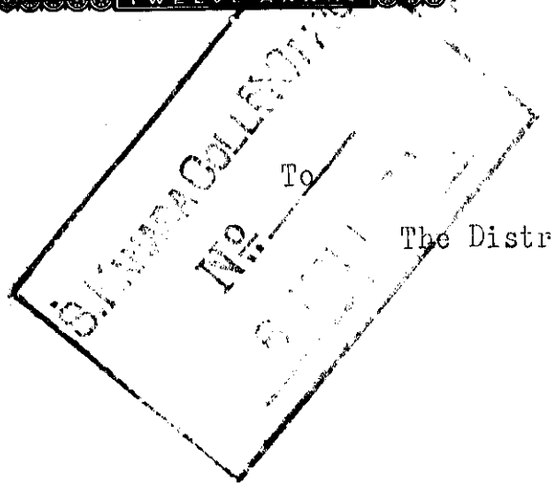

To

The District Magistrate of
South Kanara, Mangalore.

38
420-C-1-30

Humble petition of Y.Kristappa Setti, Agent, Standard Oil Company, Ltd. of New York, residing in Baindur, dated 10th December 1929.

10/1/30

Honoured Sir,

MRfC 468-1930

As I intend to store 5000 gallons of Motor Spirit (petrol) in cans, drums or barrels otherwise than in bulk belonging to the Standard Oil Company which I represent here in the shed, the particulars of which are given below, I request that your Honour may be graciously pleased to grant me storage license for that purpose for the year 1930.

Necessary license fees will be paid at the Kundapur Sub Treasury when called upon to do so.

Description of the Shed.

Shed constructed of stone with tiled roof and ceiling of zinc sheets in Survey No. 100/10 of Coondapoor -- village, belonging to Mr. K. Vaman Shanabhog of Coondapoor Village, Kundapoor.

I beg to remain,
Honoured Sir,
Your most obedient servant,

Petitioner.

Forwarded to the Tahsildar Magistrate Coondapoor for inspection of the building and report whether it complies with all the conditions of the Rules Pages 142 & 143 of Police Orders Vol II

8.1.30

for Executive

7.220. M. No. 420. 30.

Resubmitted to the DC- Mangalore
S. Kanara. I have visited the
~~the~~ land referred to on the
reverse. It complies with
all the conditions of the
B. Form license. It lies
in the north eastern portion
of S. No. $\frac{100}{10}$ about 14 feet to
the south of the water channel
forming the northern boundary
of S. No $\frac{100}{10}$, and about 15 feet
to the west of the eastern
boundary of the said No $\frac{100}{10}$.

D. KANARA COLLR. OFFICE
REC'D 1. 2. 30
2 FEB 30

Recommended
Subject to
Orders

The conditions of the B form licence
(4)
h 135 Police order Vol II are said to be all fulfilled by the Med.
rule (3) (b). read with Fee of Rs 20 may be called
(3) (g). for and I am recommended to Grant a B form licence
7.220. M 2.30.

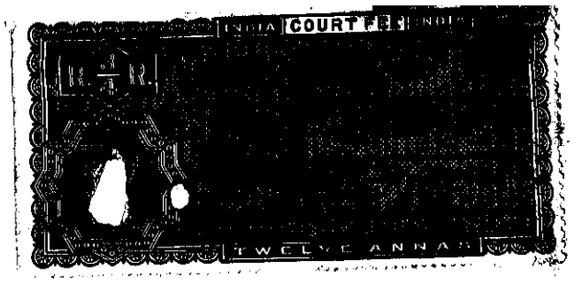

5 3

To

The District Magistrate of

South Kanara, Mangalore.

Humble petition of Y.Kristappa Setti,
Agent, Standard Oil Company, Ltd. of
New York, residing in Baindur, dated
~~10th December 1929~~ 10 January 1930

Honoured Sir,

As I intend to store 5000 gallons of Motor Spirit (petrol) in cans, drums or barrels otherwise than in bulk belonging to the Standard Oil Company which I represent here in the shed, the particulars of which are given below, I request that your Honour may be graciously pleased to grant me storage license for that purpose for the year 1930.

Necessary license fees will be paid at the Kundapur Sub Treasury when called upon to do so.

Description of the Shed.

Shed constructed of stone with tiled roof and ceiling of zinc sheets in Survey No. 15/5 of Yedthare -- village, belonging to Sunkawagoli Siddappaya Bhatta of Yeddthare Village Byndoor.

37 feet to the South of Kollur road S.No 70

15 feet to the East of the northern boundary of the Kolldeep

I beg to remain,

Honoured Sir,

Your most obedient servant,

Petitioner.

C-22852 6

C+1203-30

NRef Q- 1368-1930

Forwarded to the Taheildar - Majestic

Grind apart for inspection, and report whether the site and building comply with all the conditions of the B form licence. The Survey no and description should also be verified.

1.7.1930 } District Magistrate of S. Kanara

The papers of the reserve S. for local enquiry.

62

N. Dis Re 1203-30
3.3.30

Resubmitted to the District Magistr
South Kanara.

2. I have inspected the building
constructed by the petitioner. It is situated
in S.no. 15/5 of Yedtare, 35 to the south of the
Baindur Kollur road and 15 feet to the east
of the western boundary of the holding S no: 15/5. It complies with
all the conditions specified in G. Form
license. License applied for may be granted

Yakshi office. Compound
Dated 3.3.1930

R Bheemaiah
Yakshidar

For orders

Petr has already been called upon to produce a
Tny. Chalan receipt for Rs 20 for storage of petrol
in 2 C.7
storage license in his shed at Yendapur
This is for storage of petrol
of 5000 gallons - also otherwise than in bulk -
in his shed at Yedtare
If deemed fit a Tny Chalan for Yes
Rs 20 may be called for about this also 1/3/30

606—5-11-29.

Date. Initials.

for Exam. Q.1.a

Land Revenue DEPARTMENT.

22,992—8-82.

T. & A. 1 (B).

ORIGINAL.

"The receipt is not binding or valid on Government unless it is signed (1) by the Huzur Treasurer and (2) by the English Hd. Acctt. when the amount is under Rs. 500 and also (3) by the Try. Dy. Collector when the amount is Rs. 500 or more."

"500 ರೂಪಾಯಿ ವಳಗಿನ ಮೊಬಲಗಿನದ್ದಾದರೆ (1) ಹಜೂರ್ ಟ್ರೆಜರರಿಂದ - ಮ - (2) ಇಂಗ್ಲೀಷ್ ಹೇಡ್ ಎಕೌಂಟಾಂಟರಿಂದ, ಮತ್ತು 500 ರೂಪಾಯಿ - ಯಿಂ - ಅದರಕ್ಕಿಂತ ಹೆಚ್ಚಿನ ಮೊಬಲಗಿನದ್ದಾದರೆ (3) ಖಜಾನಾ ಡಿಪ್ಯುಟಿ ಕಲೆಕ್ಟರರಿಂದ ದಸ್ಕತು ಆದ ವಿನಹಾ, ಈ ರಸೀದಿಯು ಗವರ್ನಮೆಂಟಿನವರಮೇಲೆ ಬದ್ಧೀಕರಿಸತಕ್ಕದ್ದಲ್ಲಾ - ಮ - ಕಿಂದುವಲ್ಲಾ."

Chalan for payment of money into the Huzur Treasury at Coondapoor

ಹಣ ಪಾವತಿಮಾಡಿದಬಗ್ಗೆ ಚಲನ್ ಯಾನೆ ಜಮೇ ಚೀಟು.

No. 133

DISTRICT TREASURY
13 MAR 1930
TALUKA, MANGALORE

By whom paid. ಯಾರಿಂದ ಪಾವತಿಮಾಡಿಸೋಣಾದ್ದು.	What account. ಯಾವ ಬಾಬ್ತು.	Amount. ಮೊಬಲಗು.	Monthly consecutive No assigned to the credit in the Day-book ಈ ಬೂಕಿನಲ್ಲಿ ಜಮೆ ಖಚ್ಚಾತಿಗೆ ಕೊಡೋಣಾದ ತಿಂಗಳೆಗಟ್ಟಿನ ಜಂಬರಾ ನಂಬ್ರ.
Y. Krishappa Shetty Baindur	Licence fee for dangerous petroleum storage at Baindur	Rs. ರೂ. 20	A. ಆ. 0 P. ಪೈ 0
Date 19 ತಾ. 19 4. 3. 1930	TOTAL (in words and figures) .. ಜುಮಲಾ (ಅಕ್ಷರಗಳಲ್ಲಿ - ಮ - ಅಂಕೆಗಳಲ್ಲಿ). Rupees Twenty only	20	0 0

Signature of Remitter. ಹಣ ಕಳುಹಿಸಿದವನ ದಸ್ಕತು.

RECEIVED Rupees (20) Cash ನಮೂ ರೂಪಾಯಿ.

Coondapoor HUZUR TREASURY, ಹಜೂರ್ ಖಜಾನಾ,

The 4-3-1930 ತಾ. 19

Entered. ಲೆಖ್ಖಕ್ಕೆ ದಾಖಲುಮಾಡಲಾಯಿತು.

Signature of Treasurer. ಖಜಾನೆಯ ದಸ್ಕತ್ತು.

Signature of English Head Accountant. ಇಂಗ್ಲಿಷ್ ಹೆಡ್ ಎಕೌಂಟಾಂಟರ ದಸ್ಕತು.

Signature of Treasury Officer. ಖಜಾನಾ ಉದ್ಯೋಗಸ್ಥರ ದಸ್ಕತು.

9 13 N

R. P. XXXII—1. — 44,500 30-4 29.

R.P. XXXII—1.

"The receipt is not binding or valid on Government unless it is signed (1) by the shroff and (2) by the Taluk Hd. Acctt. or Taluk Sarishtadar."

"(1) ಸರಾಫನಿಂದಾ - ವ - (2) ತಾಲೂಕು ಹೆತ್ ಎಕ್ಕೌಂಟಾಂಟ - ಯಾ - ತಾಲೂಕು ಶಿರಸ್ತೆದಾರರಿಂದಾ ದಸ್ಕತು ಆದ ವಿನಹಾ ಈ ರಜೀದಿಯು ಗವರ್ನಮೆಂಟಿನವರಮ್ಮೇಲೆ ಬಿಲ್ಲಿಕ್ಕರಿಸತಕ್ಕದ್ದಲ್ಲಾ - ವ - ಹಿಂದುವಲ್ಲಾ."

Chalan for payment of money into the Sub-Treasury at
ಸಬ್ ಖಜಿನೆಯಲ್ಲಿ ಹಣ ಪಾವತಿಮಾಡಿದಬ್ಯೆ ಜೆಲನ್ ಯಾಸೆ ಚಲನೀ ಚೀಟು.

No. 415
ಸಂಬ್ರ

By whom paid. ಯಾರಿಂದಾ ಪಾವತಿಮಾಡಿದ್ದು.	On account of ಯಾವ ಖಾತೆಗೆ ಸೇರಿದ್ದು.	Amount. ಕೊಬಲಗು.			Monthly consecutive No. assigned to the credit in the day-book. ಈ ಬೂಕಿನಲ್ಲಿ ಜಮೆ ಖಚ್ಚಾಗಿ ಕೊಡೋಕಾದ ತಿಂಗಳಗಟ್ಟಿ ಜಂದರಾ ನಂಬ್ರ.	
		Rs. ರೂ.	A ಆ	P. ಪೈ	No. ನಂಬ್ರ.	Month. ತಿಂಗಳು.
Y. Thimmappa Shetty Bantwal	Licence for dangerous Petroleum storage	20	0	0	XVII Annual Renewal Licence for storage of Petroleum	
Date ತಾ. 21. 2. 19 1930	TOTAL (in words and figures). ಜುಮಲಾ (ಅಕ್ಷರಗಳಲ್ಲಿ - ಪ - ಅಂಕೆಗಳಲ್ಲಿ). Rupees Twenty only	20	0	0		

Signature of Remitter: for
ಹಣ ಕಳುಹಿಸಿದವನ ದಸ್ಕತು. K. Venkatramana

Received Rupees 20 (Twenty only)
ಜಮಾ ರೂಪಾಯು

(One Rupee)

SUB-TREASURY, ಸಬ್ ಟ್ರೆಜರಿ,
The 21. 2. 1930 19
ತಾ.

Entered.
ಲೆಖ್ಖಕ್ಕೆ ಧಾಖಲುಮಾಡಲಾಯಿತು.

Shroff.

Taluk Hd. Acctt or Taluk Sarishtadar.
ತಾಲೂಕು ಹೆತ್ ಎಕ್ಕೌಂಟಾಂಟ ಅಥವಾ ತಾಲೂಕು ಶಿರಸ್ತೆದಾರ

Secft. II-5(a)—50,606—5-11-29.

Revenue DEPARTMENT.

	Date.	Initials.
When received for Fair-copying.		
When copied ..	4/4	
When examined ..		
When signed ..		
When despatched ..		

Petroleum

Two Form B licences
dangerous - 5000 gallons each
- Mr Y. Krishtappa Shetty, Bandur
South Kanara Dt - Granted

READ AGAIN G.O. No. ....., dated 19

" " " " " 19

READ ALSO:—

C. No. 2649 C From the D.M. S. Kanara, No. 465 Rev C, dated 28-3- 1930

" " " " " 19

" " " " " 19

ORDER.

Mr

No. 1529, dated 4/4/30 19 .

Two licences in Form B of the Petroleum Rules will be issued to Mr Y. Krishtappa Shetty Bandur for the storage of 5000 (five thousand) gallons each of dangerous petroleum in his storage sheds in Coondapoor and Yedthare villages respectively in the South Kanara Dt

2 The two licences will be forwarded to the DM. South Kanara for delivery to the applicant

KDW 31.3.30

SWS 1-4-30

1.2.3.

1/4/30

To

The DM. S. Kanara
(with licences)

Chief Inspector of Explosives
in India
(2 spare specimens)

The Standard Oil Co of India (for information)

No. IV 9 55.
100—Jan. 1930.

Form B.

(Rule 3 of Chapter IV of Part II).

License to possess dangerous Petroleum, otherwise than in bulk, in quantity exceednig forty gallons for the year ending 31st December 193 .

"Save as provided in Rules 9 (1), 13 and 14 of Chapter IV, Part II of the Petroleum Rules, every license for the possession of petroleum shall remain in force until the 31st December next following the date of issue of the license."

No.

Fee Rs. 20
(Twenty only)

License is hereby granted to Mr. Y. Krishtappa Shetti, Bangalore

for the storage, in the storage shed described below, of 5000 (five thousand)

gallons of dangerous Petroleum, subject to the Rules for the Storage of Petroleum published in Notification No. 441, dated 24th July 1909, and to the further conditions on the back of this license.

~~President~~, Secretary to the Govt.
~~Corporation~~ of Madras.

The April 1930.

(Description of the storage shed above referred to)

In the storage shed in Survey No 100/10 of Cottapalle village, South Kanara Dt.

Endorsement on Form B.

CONDITIONS OF LICENSE.

1. If the licensing officer call upon the holder of a license, by notice in writing, to execute any repairs of the storage shed, which may, in the opinion of such officer, be necessary for the safety of the shed, the holder of the license shall execute the repairs within such period, not being less than one month from the date of receipt of the notice, as may be fixed by the notice.

2. The license-holder is prohibited from delivering any quantity of dangerous petroleum exceeding three gallons to any one who has not a license under Section 5 or Section 6 of the Act, or any less quantity of such petroleum, except in accordance with the conditions of the proviso to Section 6 of the Act, as to the vessels in which the petroleum must be contained.

3. The petroleum shall be stored in gas-tight tinned or galvanized sheet iron, steel, or lead plate receptacles containing each not more than sixty-five gallons and fitted with well-made filling holes and well-fitting screw plugs, or fitted with screw cap or other cap with metal air-tight undercap. Such receptacles shall be packed in strong wooden cases, the thickness of the wood to be not less than three-eighths of an inch; provided that wood cases shall not be necessary when the receptacles are made of tinned or galvanized sheet iron or steel, and have the following thickness of metal:—

	Not less than
(1) When the capacity does not exceed 2 gallons ...	27 B. W. G.
(2) When the capacity exceeds 2 but does not exceed 4 gallons ...	22 B. W. G.
(3) When the capacity exceeds 4 but does not exceed 8 gallons ...	20 B. W. G.
(4) When the capacity exceeds 8 but does not exceed 20 gallons ...	16 B. W. G.
(5) When the capacity exceeds 20 but does not exceed 30 gallons ...	14 B. W. G.
(6) When the capacity exceeds 30 but does not exceed 40 gallons...	12 B. W. G.
(7) When the capacity exceeds 40 but does not exceed 65 gallons ...	10 B. W. G.

4. An air-space of at least one-tenth of its capacity shall be left in each receptacle at the time of filling.

5. The receptacle shall be so substantially constructed and secured as not to be liable, except, under circumstances of grave negligence or extraordinary accident, to be broken of become defective, leaky or insecure.

6. The receptacles shall be labelled in accordance with the provisions of Section 7 of the Act.

7. Any receptacle, before being repaired, shall be cleared of all dangerous petroleum and of all dangerous vapours arising from the same.

8. The storage shed shall be constructed of masonry or other uninflammable material with terraced, tiled or iron roofs and with tiled or paved or earthen floors.

9. Either the doorways and other openings of the storage shed shall be built up to a height of two feet above the level of the road or street, or the floor sunk to a depth of two feet below the level of the road or street, so that the peroleum cannot flow out from the building in case of its escape from the receptacle in which it is contained, or the building itself shall be surrounded with a masonry wall or embankment or both not less than two feet high. When the quantity of petroleum stored exceeds 16,000 gallons the height or depth shall be three feet.

A combination of these methods is permissible.

10. All ventilating openings in the storage shed shall be protected by strong wire gauze.

11. No light, except a light of such strength, position and character as is not liable to ignite any inflammable vapour, nor fire of any description, shall be permitted at any time within the storage shed.

12. All due precautions shall be taken for the prevention of unauthorized persons having access to any dangerous petroleum kept and to the vessels containing or having actually contained the same.

13. Every person managing or employed on or in connection with the storage shed shall abstain from any act whatever which tends to cause fire or explosion and which is not reasonably necessary, and shall prevent any other person from doing such act.

14. The drum or other receptacle containing dangerous petroleum shall only be opened on the licensed premises at or immediately adjoining the storage shed and for the time necessary for drawing off the petroleum and during such drawing off every reasonable precaution shall be adopted for preventing the escape of dangerous petroleum or the vapour therefrom.

15. The following distances shall be kept clear from protected works round the storage shed:—

Quantity to be stored.	*Distance to be kept clear*
Not exceeding 500 gallons	20 feet.
From 500 to 1,000 gallons	25 feet.
From 1,000 to 5,000 gallons	30 feet.
From 5,000 to 15,000 gallons	40 feet.
From 15,000 to 25,000 gallons	50 feet.
From 25,000 to 35,000 gallons	60 feet.
From 35,000 to 50,000 gallons	70 feet.
From 50,000 and over gallons	100 feet,

Provided that these distances may be reduced by the Licensing authority on the recommendation of the Chief Inspector of Explosives in cases where screen walls are provided or other special precautions taken, or where there are special circumstances that in the opinion of the Chief Inspector of Explosives warrant the reduction.

16. Provided that when the quantity to be possessed does not exceed 60 gallons the provisions of conditions 8, 9 and 15 shall not apply, but the licensee shall observe the following conditions:—

(i) The storage shed in which the dangerous petroleum is stored shall be well ventilated and constructed of uninflammable material, provided, however, that the doors and windows may be of wood.

(ii) Where a storage shed forms part of or is attached to, another building and when the intervening floor or partition is of an unsubstantial or inflammable character or has openings therein, the whole of such building shall be deemed to be the storage shed and no portion of such storage shed shall be used as a dwelling house or as a place where persons assemble. The storage shed shall have a separate entrance from the open air distinct from any building or dwelling in which persons assemble.

17. The storage shed shall be liable to inspection by an officer not being of lower rank than a Sub-Inspector of Police authorised by the Governor-in-Council in this behalf.

No. IV. 9-55.
100—Jan. 1930.

Form B.

(Rule 3 of Chapter IV of Part II).

License to possess dangerous Petroleum, otherwise than in bulk, in quantity exceednig forty gallons for the year ending 31st December 193

"Save as provided in Rules 9 (1), 13 and 14 of Chapter IV, Part II of the Petroleum Rules, every license for the possession of petroleum shall remain in force until the 31st December next following the date of issue of the license."

No.

Fee Rs. 20
(Twenty only)

License is hereby granted to Mr Y. Krishtappa Sheth, Bandar

for the storage, in the storage shed described below, of 5000 (five thousand)

gallons of dangerous Petroleum, subject to the Rules for the Storage of Petroleum published in Notification No. 441, dated 24th July 1909, and to the further conditions on the back of this license.

~~President~~, Secretary
~~Corporation~~ of Madras.

The April 1930.

(Description of the storage shed above referred to)

on his storage shed in Survey No 15/5 of Yedthanur village, Salt Kanam Rd

Endorsement on Form B.

CONDITIONS OF LICENSE.

1. If the licensing officer call upon the holder of a license, by notice in writing, to execute any repairs of the storage shed, which may, in the opinion of such officer, be necessary for the safety of the shed, the holder of the license shall execute the repairs within such period, not being less than one month from the date of receipt of the notice, as may be fixed by the notice.

2. The license-holder is prohibited from delivering any quantity of dangerous petroleum exceeding three gallons to any one who has not a license under Section 5 or Section 6 of the Act, or any less quantity of such petroleum, except in accordance with the conditions of the proviso to Section 6 of the Act, as to the vessels in which the petroleum must be contained.

3. The petroleum shall be stored in gas-tight tinned or galvanized sheet iron, steel, or lead plate receptacles containing each not more than sixty-five gallons and fitted with well-made filling holes and well-fitting screw plugs, or fitted with screw cap or other cap with metal air-tight undercap. Such receptacles shall be packed in strong wooden cases, the thickness of the wood to be not less than three-eighths of an inch; provided that wood cases shall not be necessary when the receptacles are made of tinned or galvanized sheet iron or steel, and have the following thickness of metal:—

	Not less than
(1) When the capacity does not exceed 2 gallons ...	27 B. W. G.
(2) When the capacity exceeds 2 but does not exceed 4 gallons ...	22 B. W. G.
(3) When the capacity exceeds 4 but does not exceed 8 gallons ...	20 B. W. G.
(4) When the capacity exceeds 8 but does not exceed 20 gallons ...	16 B. W. G.
(5) When the capacity exceeds 20 but does not exceed 30 gallons ...	14 B. W. G.
(6) When the capacity exceeds 30 but does not exceed 40 gallons...	12 B. W. G.
(7) When the capacity exceeds 40 but does not exceed 65 gallons ...	10 B. W. G.

4. An air-space of at least one-tenth of its capacity shall be left in each receptacle at the time of filling.

5. The receptacle shall be so substantially constructed and secured as not to be liable, except, under circumstances of grave negligence or extraordinary accident, to be broken of become defective, leaky or insecure.

6. The receptacles shall be labelled in accordance with the provisions of Section 7 of the Act.

7. Any receptacle, before being repaired, shall be cleared of all dangerous petroleum and of all dangerous vapours arising from the same.

8. The storage shed shall be constructed of masonry or other uninflammable material with terraced, tiled or iron roofs and with tiled or paved or earthen floors.

9. Either the doorways and other openings of the storage shed shall be built up to a height of two feet above the level of the road or street, or the floor sunk to a depth of two feet below the level of the road or street, so that the peroleum cannot flow out from the building in case of its escape from the receptacle in which it is contained, or the building itself shall be surrounded with a masonry wall or embankment or both not less than two feet high. When the quantity of petroleum stored exceeds 16,000 gallons the height or depth shall be three feet.

A combination of these methods is permissible.

10. All ventilating openings in the storage shed shall be protected by strong wire gauze.

11. No light, except a light of such strength, position and character as is not liable to ignite any inflammable vapour, nor fire of any description, shall be permitted at any time within the storage shed.

12. All due precautions shall be taken for the prevention of unauthorized persons having access to any dangerous petroleum kept and to the vessels containing or having actually contained the same.

13. Every person managing or employed on or in connection with the storage shed shall abstain from any act whatever which tends to cause fire or explosion and which is not reasonably necessary, and shall prevent any other person from doing such act.

14. The drum or other receptacle containing dangerous petroleum shall only be opened on the licensed premises at or immediately adjoining the storage shed and for the time necessary for drawing off the petroleum and during such drawing off every reasonable precaution shall be adopted for preventing the escape of dangerous petroleum or the vapour therefrom.

15. The following distances shall be kept clear from protected works round the storage shed:—

Quantity to be stored.	*Distance to be kept clear*
Not exceeding 500 gallons	20 feet.
From 500 to 1,000 gallons	25 feet.
From 1,000 to 5,000 gallons	30 feet.
From 5,000 to 15,000 gallons	40 feet.
From 15,000 to 25,000 gallons	50 feet.
From 25,000 to 35,000 gallons	60 feet.
From 35,000 to 50,000 gallons	70 feet.
From 50,000 and over gallons	100 feet,

Provided that these distances may be reduced by the Licensing authority on the recommendation of the Chief Inspector of Explosives in cases where screen walls are provided or other special precautions taken, or where there are special circumstances that in the opinion of he Chief Inspector of Explosives warrant the reduction.

16. Provided that when the quantity to be possessed does not exceed 60 gallons the provisions of conditions 8, 9 and 15 shall not apply, but the licensee shall observe the following conditions:—

(i) The storage shed in which the dangerous petroleum is stored shall be well ventilated and constructed of uninflammable material, provided, however, that the doors and windows may be of wood.

(ii) Where a storage shed forms part of or is attached to, another building and when the intervening floor or partition is of an unsubstantial or inflammable character or has openings therein, the whole of such building shall be deemed to be the storage shed and no portion of such storage shed shall be used as a dwelling house or as a place where persons assemble. The storage shed shall have a separate entrance from the open air distinct from any building or dwelling in which persons assemble.

17. The storage shed shall be liable to inspection by an officer not being of lower rank than a Sub-Inspector of Police authorised by the Governor-in-Council in this behalf.